

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 64-009455

(43)Date of publication of application : 12.01.1989

(51)Int.Cl. G03C 7/32

G03C 7/26

(21)Application number : 62-164619

(71)Applicant : FUJI PHOTO FILM CO LTD

(22)Date of filing : 01.07.1987


(72)Inventor : SAKAGAMI MEGUMI
 ICHIJIMA YASUSHI
 NISHIKAWA TOSHIHIRO
 ABE AKIRA
 TAKADA SHUNJI

(54) SILVER HALIDE COLOR PHOTOGRAPHIC MATERIAL AND PROCESSING METHOD THEREOF

(57)Abstract:

PURPOSE: To improve the granular characteristic and sharpness of a color photographic material so that rapid processing can be made by incorporating silver halide emulsions having a prescribed average silver iodide content and specific coupler into a titled material.

CONSTITUTION: The average silver iodide content of the emulsions contained in all the silver halide emulsion layers is specified to $\leq 2\text{mol.}\%$ and the coupler expressed by the formula I is incorporated into ≥ 1 layers of the emulsion layers or non-photosensitive layers. In the formula, A denotes a residual coupler group for color forming development; (a), (v), (w) denote 0, 1; L1, L2 denote a timing group; B1, B2 denote a residual group which can reduce the oxidation product of a developing agent. The compds. expressed by the formula II, etc., are usable for the coupler expressed by the formula. The sensitivity of this photographic material is preferably $\geq 25\text{ISO}$ and the total of the processing time consisting of developing, desilvering, rinsing and/or stabilizing stages is preferably 1W9min.

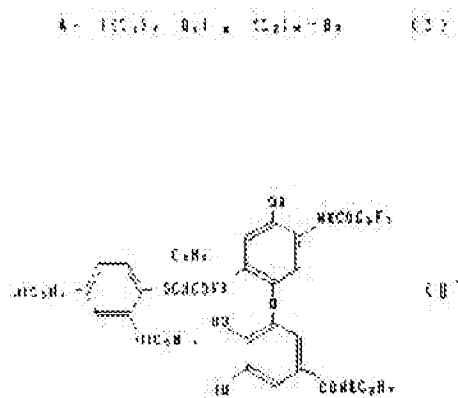

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the

examiner's decision of rejection or application
converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of
rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office